


Techniblu™ Stock Spiral

- In stock and available to ship within 48 hours
- The clear blue color allows you to see impurities in your air system
- Reusable, field repairable compression fittings
- Thread sealant supplied on all male fittings



This is a special program on our most popular sizes/lengths of polyurethane clear blue spiral hoses. The Techniblu™ Spiral is an economical choice for your spiral hose needs. These spirals are lightweight and abrasion resistant. They maintain excellent memory while avoiding kinking when in use.

Techniblu™ spirals are manufactured from Shore A 98 durometer polyurethane tubing. The port side tail is 4" with a brass male NPT rigid fitting. The tool side tail is 20" with a brass male NPT swivel fitting.

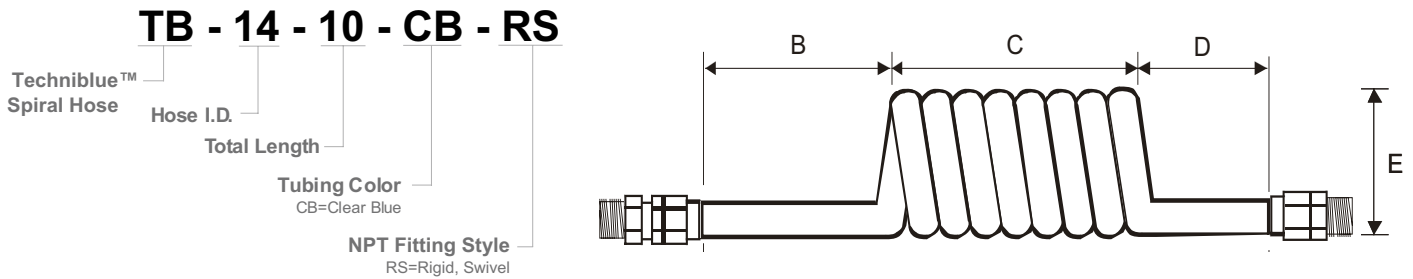

	part number	hose I.D.	hose O.D.	working length (feet)	total length (feet)	total turns	dim. A (inches)	dim. B (inches)	dim. C (inches)	dim. D (inches)	dim. E (inches)
1/4 fitting	TB-14-10-RS	1/4	3/8	8	10	19	31.125	20	7.125	4	2.002
	TB-14-15-RS	1/4	3/8	12	15	31	35.625	20	11.625	4	2.002
	TB-14-20-RS	1/4	3/8	16	20	42	39.750	20	15.750	4	2.002
	TB-14-25-RS	1/4	3/8	20	25	54	44.250	20	20.250	4	2.002
3/8 fitting	TB-2164-10-RS	21/64	1/2	8	10	14	31.000	20	7.000	4	2.681
	TB-2164-15-RS	21/64	1/2	12	15	23	35.500	20	11.500	4	2.681
	TB-2164-20-RS	21/64	1/2	16	20	32	40.000	20	16.000	4	2.681
	TB-2164-25-RS	21/64	1/2	20	25	40	44.000	20	20.000	4	2.681
	TB-38-10-RS	3/8	9/16	8	10	12	31.000	20	7.000	4	3.750
	TB-38-15-RS	3/8	9/16	12	15	19	36.000	20	12.000	4	3.750
	TB-38-20-RS	3/8	9/16	16	20	26	40.000	20	16.000	4	3.750
	TB-38-25-RS	3/8	9/16	20	25	34	45.000	20	21.000	4	3.750
1/2 fitting	TB-12-15-RS	1/2	3/4	12	15	13	33.750	20	9.750	4	4.500
	TB-12-20-RS	1/2	3/4	16	20	19	36.000	20	12.000	4	4.500
	TB-12-25-RS	1/2	3/4	20	25	24	42.000	20	18.000	4	4.500

Specifications:

Working Pressure: 140 PSI; (8 Bar); 8kgf/Cm2 at 68F°(20C°)

Burst Pressure: 428 PSI; (30 Bar); 30kgf/Cm2 at 68F°(20C°)

Working Temperature Range: -68°F(-55°C) to +140°F(+60°C)