

Technithane™ Spiral

- Multiple color, length and fitting options available
- Industry-standard sizing
- Reusable, field repairable compression fittings
- Thread sealant supplied on all male fittings




The Technithane™ spiral hose was developed as an alternative to nylon spirals and remains flexible from -68°F to +140°F. Like the Techniblue™ spiral, Technithane™ spirals are also lightweight and abrasion resistant. They maintain excellent memory while avoiding kinking when in use. Our ether-based polyurethane is air, water, oil and chemical resistant and resists wear 5 to 10 times better than ordinary rubber hose.



By selecting dimensions that have become an industry standard, ATP has taken the guesswork out of selecting the spiral that is right for you. All you need to do is select the color, length and fittings.

You can expect your working length to be approximately 80% of the total length. For fractional spirals the port side tail is 4" and the tool side tail is 20". For metric spirals the port side tail is 100mm and the tool side tail is 500mm.

TT - 516 - 10 - BK - RS

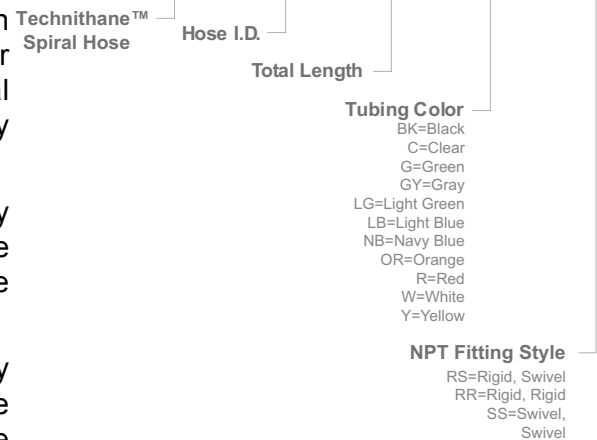

TT - 8 - 2.5 - BK - RS

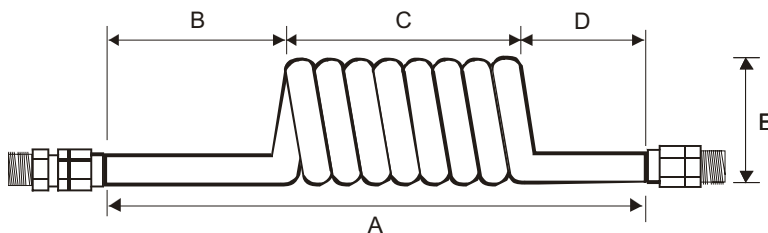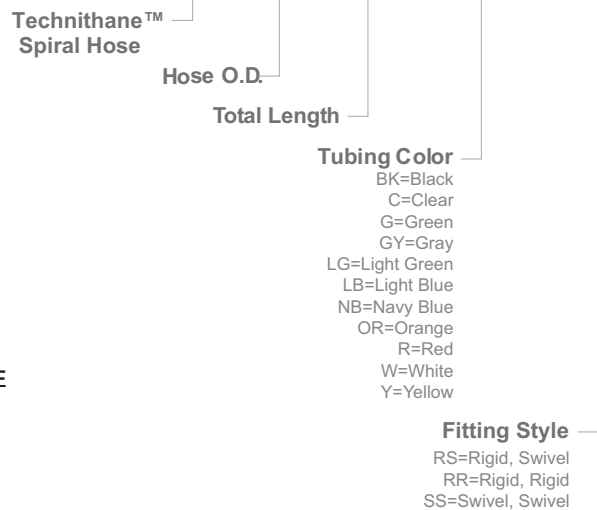

Specifications:

Working Pressure: 140 PSI; (8 Bar); 8kgf/Cm2 at 68F°(20C°)
Burst Pressure: 428 PSI; (30 Bar); 30kgf/Cm2 at 68F°(20C°)
Working Temperature Range: -68°F(-55°C) to +140°F(+60°C)

Technithane™ Spiral

	part number	hose I.D.	hose O.D.	working length (feet)	Total length (feet)	total turns	dim. A (inches)	dim. B (inches)	dim. C (inches)	dim. D (inches)	dim. E (inches)
1/4 fitting	TT-316-10-__	3/16	5/16	8	10	19	31.125	20	7.250	4	1.625
	TT-316-15-__	3/16	5/16	12	15	31	35.875	20	11.875	4	1.625
	TT-316-20-__	3/16	5/16	16	20	42	40.250	20	16.250	4	1.625
	TT-316-25-__	3/16	5/16	20	25	54	45.000	20	21.000	4	1.625
	TT-14-10-__	1/4	3/8	8	10	14	31.125	20	7.125	4	2.002
	TT-14-15-__	1/4	3/8	12	15	23	35.625	20	11.625	4	2.002
	TT-14-20-__	1/4	3/8	16	20	32	39.750	20	15.750	4	2.002
	TT-14-25-__	1/4	3/8	20	25	40	44.250	20	20.250	4	2.002
3/8 fitting	TT-2164-10-__	21/64	1/2	8	10	12	31.000	20	7.000	4	2.681
	TT-2164-15-__	21/64	1/2	12	15	19	35.500	20	11.500	4	2.681
	TT-2164-20-__	21/64	1/2	16	20	26	40.000	20	16.000	4	2.681
	TT-2164-25-__	21/64	1/2	20	25	34	44.000	20	20.000	4	2.681
1/2 fitting	TT-1332-10-__	13/32	5/8	8	10	9	29.000	20	5.000	4	4.254
	TT-1332-15-__	13/32	5/8	10	15	13	32.750	20	8.750	4	4.254
	TT-1332-20-__	13/32	5/8	15	20	19	35.875	20	11.875	4	4.254
	TT-1332-25-__	13/32	5/8	20	25	24	39.000	20	15.000	4	4.254

	part number	hose I.D.	hose O.D.	working length (mm)	total length (m)	total turns	dim. A (mm)	dim. B (mm)	dim. C (mm)	dim. D (mm)	dim. E (mm)
BSPT fittings available	TT-8-2.5-__	5	8	2,000	2.5	18	780	500	180	100	42
	TT-8-5-__	5	8	4,000	5.0	42	1,000	500	400	100	42
	TT-8-7.5-__	5	8	6,000	7.5	66	1,230	500	630	100	42
	TT-8-10-__	5	8	8,000	10	90	1,400	500	800	100	42
	TT-10-2.5-__	6.5	10	2,000	2.5	15	785	500	185	100	52
	TT-10-5-__	6.5	10	4,000	5.0	34	1,000	500	400	100	52
	TT-10-7.5-__	6.5	10	6,000	7.5	53	1,235	500	635	100	52
	TT-10-10-__	6.5	10	8,000	10	72	1,400	500	800	100	52
	TT-12-2.5-__	8	12	2,000	2.5	11	780	500	180	100	65
	TT-12-5-__	8	12	4,000	5.0	26	1,000	500	390	100	65
	TT-12-7.5-__	8	12	6,000	7.5	41	1,190	500	590	100	65
	TT-12-10-__	8	12	8,000	10	56	1,380	500	780	100	65
	TT-16-2.5-__	11	16	2,000	2.5	7	720	500	120	100	108
	TT-16-5-__	11	16	4,000	5.0	16	840	500	240	100	108
	TT-16-7.5-__	11	16	6,000	7.5	24	1,000	500	400	100	108
	TT-16-10-__	11	16	8,000	10	33	1,170	500	570	100	108

Custom colors are available, minimum quantities may apply.